


## The 6.5 MW HydroGen Electrolyser



The HydroGen technology represents a European made, fully industrialised approach in which the system, installation process, and Balance of Plant are designed for efficient, standardised deployment.

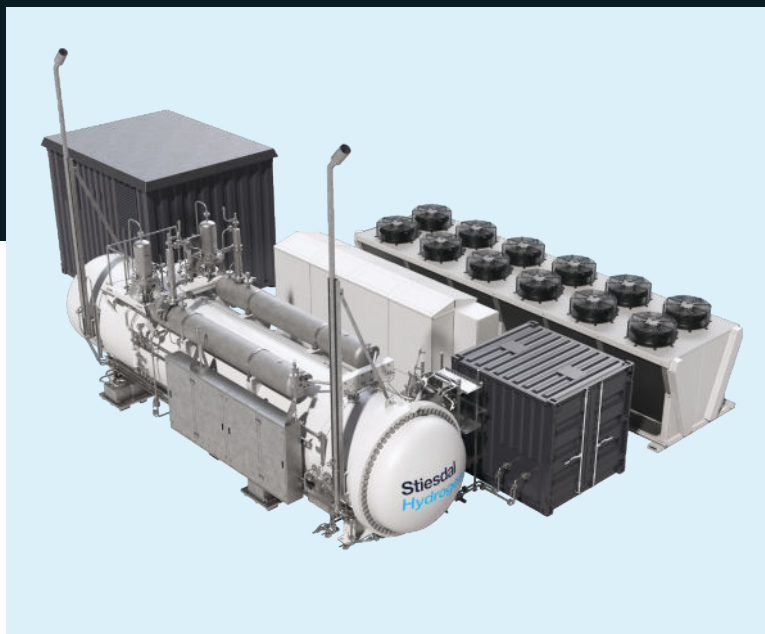

### Low green H<sub>2</sub> LCOH

- High system efficiency
- Zero degradation
- Dynamic operation
- Capture low-cost power



### High pressure and purity

- Serves downstream process
- Avoids additional compression and loss
- Enables dynamic operations



### Low system CAPEX

- Modularising and standardising
- Reduced Balance of Plant requirements
- No process buildings or HVAC



### Standardised supply chain

- EU-based and industrial manufacturing
- Designed for mass production
- Quality assurance
- Ready for GW scale-up



### Outdoor application

- No process buildings or HVAC
- Simple commissioning
- Minimal ATEX zone



### Rapid and modular deployment

- Prefabrication
- Simple and minimal work on site
- Reduces time to revenue

### The 6.5 MW platform

#### 50% CAPEX

Approximately half the European market CAPEX average of ~€1,000/kW on similar scope.\*

#### 50 % O&M cost per MW

Lower operation and maintenance cost than the 3.1 MW platform.

\* Market average of ~€1,000/kW on similar scope as per European Hydrogen Observatory.



[Scan to learn more](#)

## Scope of supply

- Pressurized Alkaline stack including temperature control
- MV transformation included
- Power supply (PSU) module with active rectifier based on IGBTs and supply for auxiliaries
- UPS-backed unit control system including dedicated safety PLC
- Auxiliary module including pumps, and heat exchanger
- Cooling systems for stack, PSU, and gas
- Pressure vessel including vents, gas & water separation, and high performance diffusion filter
- Process and electrical interconnections within and between modules

## System price

**EUR 3.150.000 – 3.300.000**

24 months warranty period, Stiesdal Hydrogen standard terms, conditional on volume and delivery period.

## Technical specifications

### Production

- Nominal AC power: 6.5 MW
- Production rate (pure H<sub>2</sub>): 1270 Nm<sup>3</sup> per hour

### Performance & Output

- System Power Consumption (AC): 4.8-5.1 kWh/Nm<sup>3</sup>
- Hydrogen delivery pressure: ambient to 35 bar
- Hydrogen purity: 99.5%

### Dynamic operation

- Operating range: 15-105%
- Ramp-up rate: 2% power per second
- Ramp-down rate: 50% power per second

### Lifecycle & Durability

- Stack lifetime: 60.000 hours or 7 years @ 100% CF
- Zero degradation concept

### Site integration

- Footprint per MW: 22 m<sup>2</sup>


# Stiesdal<sup>®</sup> Hydrogen

Stiesdal Hydrogen A/S/ Vejlevej 270, 7323 Give, Denmark

[www.stiesdalhydrogen.com](http://www.stiesdalhydrogen.com)  
[info@stiesdal.com](mailto:info@stiesdal.com)

©2026 Stiesdal A/S. All rights reserved.

All specifications in this document are for information only and are subject to change without notice. No expressed or implied representations or warranties regarding the adequacy or accuracy of the information are given. Certain options may not be available in all locations or countries.

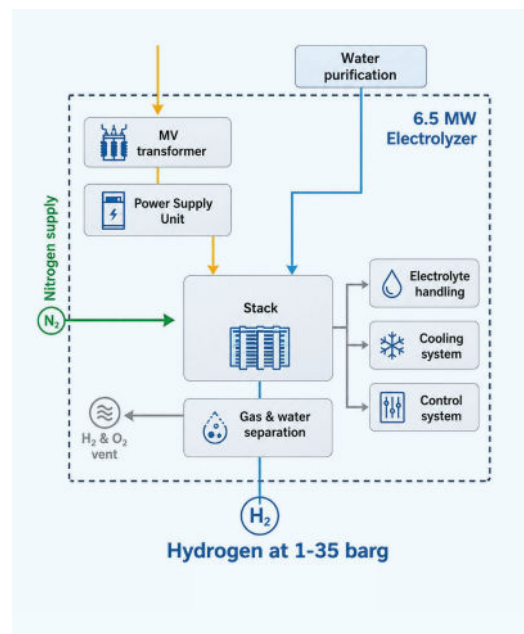

## Linear scalability

With no buildings required and simplified transportation, developers can right-size capacity immediately and scale effortlessly as demand grows:

- Deploy a single 6.5 MW unit or several
- Scale to 50 MW, 100 MW, or larger without redesigning the Balance of Plant

